Butterfly Clip

EN

Installation and user manual

Safety and compliance information

This product is designed for a specific purpose and should be used accordingly. Any other use is not recommended and may compromise the safety of the product user.

Butterfly clips are designed for seats fitted into rails in a fixed position (ECE Regulation 14.09, M2 loading).

If seatbelts are attached to the seat, the installer will require evidence that the assembly meets the appropiate directives.

Butterfly clips are tested with M2 loads applied to a single seat up to 30 kg.

The locknuts are to be used only once, if the seats are moved replace the nuts with new ones (see installation page.)

The installer ensures that there is no additional equipment or parts required from the seat supplier.

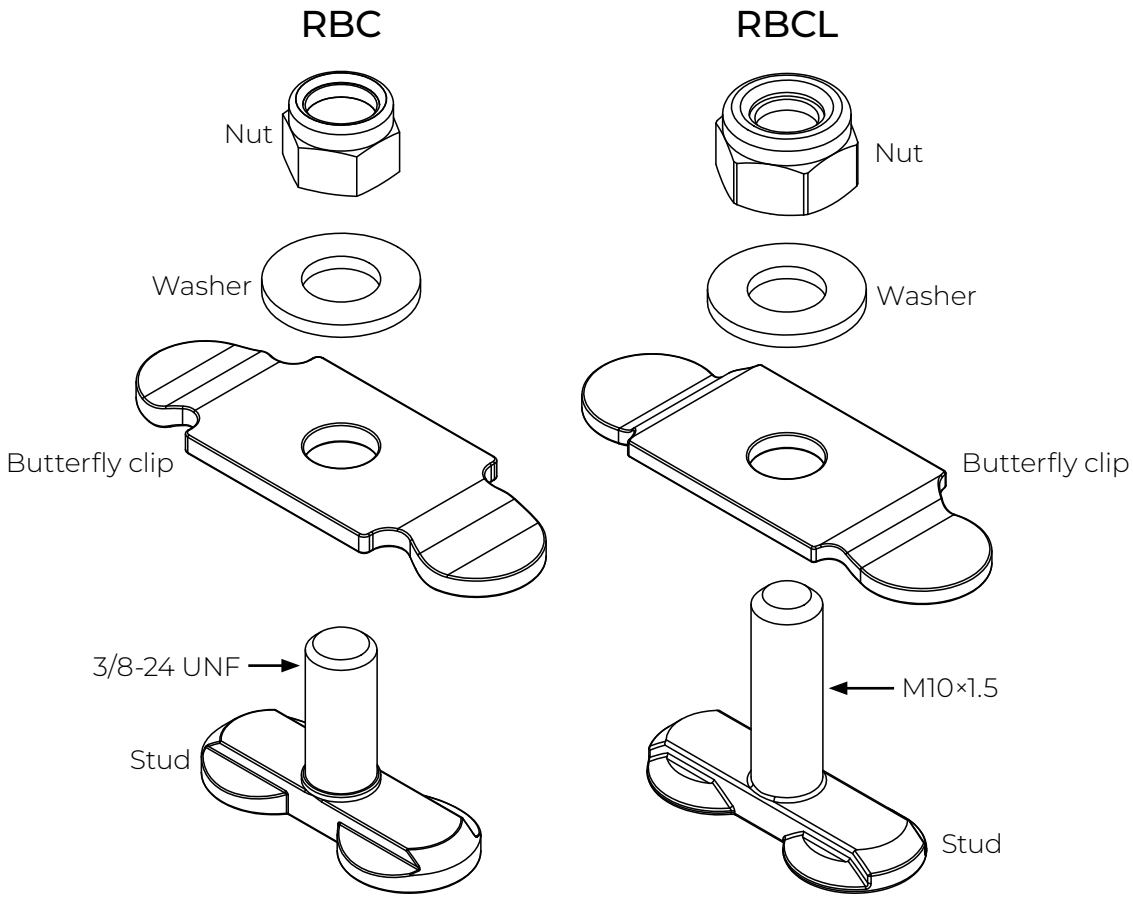

427638-1 2026/08

BraunAbility Europe AB
Åkerivägen 7
443 61 Stenkullen
Sweden

Phone: +46 302 254 00
E-mail: info@braunability.eu
www.braunability.eu

BraunAbility

Installation

For installation of rearward facing seats, please contact BraunAbility.

1 Note where each attachment point on the chair will be when installed.

2 Place the fixings in the rail, one for each attachment point on the chair (typically four).

3 Remove the washer and nut from each fixing, leaving the clip in place.

4 Place the seat on the fixings and place a washer and nut on all fixings and tighten. A screw tightening torque of 40 Nm is recommended.

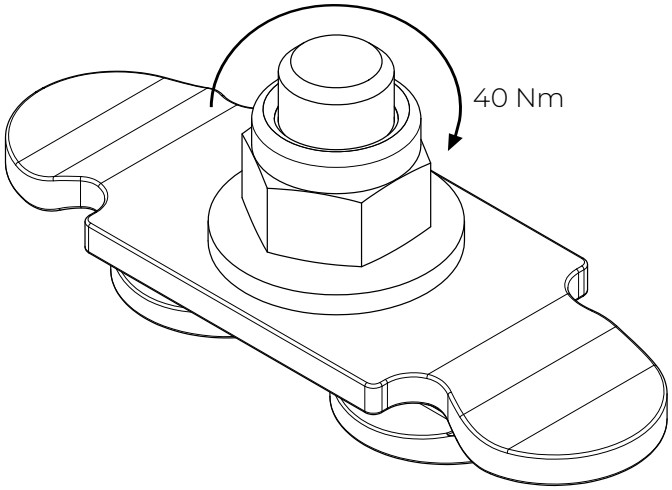

Replace all used nuts.
For RBCL use: DIN982 M10×1.5 CL.8.

For RBC use: 3/8”-24 UNF Nyloc nut meeting SAE J995 Grade 2.

5 To achieve maximum strength as an assembly, the studs must protrude beyond the nylon of the nut by a minimum of 1.5 mm.

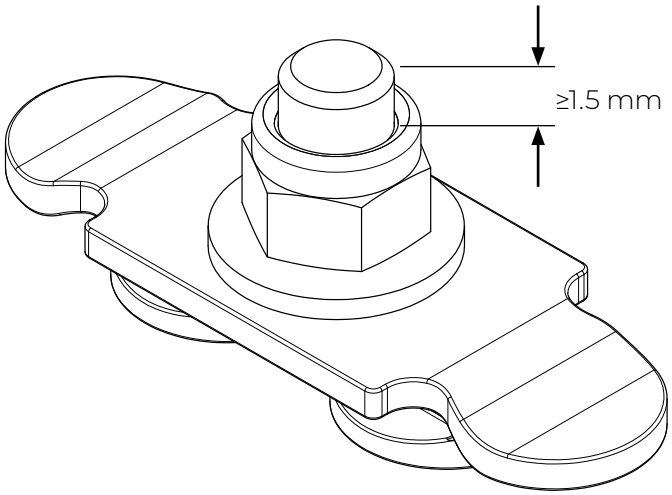

Care instructions

Regularly inspect the Butterfly Clips for damage, wear or malfunction. If any problems are identified replace immediately.

427638-1 2026/08